DESCRIPTION	ROLL LENGTH	TOW HT.	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F	DIM. G
R.H. / AS SHOWN	24"	48" (1219.2)	48" (1219.2)	38" (965.2)	56" (1422.4)	28-3/16" (716)	26-1/8" (663.6)	13" (330.2)	22" (558.8)
L.H. / OPPOSITE	(609.6)								
R.H. / AS SHOWN	16"						18-1/8" (460.4)	9" (228.6)	14" (355.6)
L.H. / OPPOSITE	(406.4)								
R.H. / AS SHOWN	24"	57" (1447.8)	57" (1447.8)	47" (1193.8)	65" (1651)	37-3/16" (944.6)	26-1/8" (663.6)	13" (330.2)	22" (558.8)
L.H. / OPPOSITE	(609.6)								
R.H. / AS SHOWN	16"						18-1/8" (460.4)	9" (228.6)	14" (355.6)
L.H. / OPPOSITE	(406.4)								

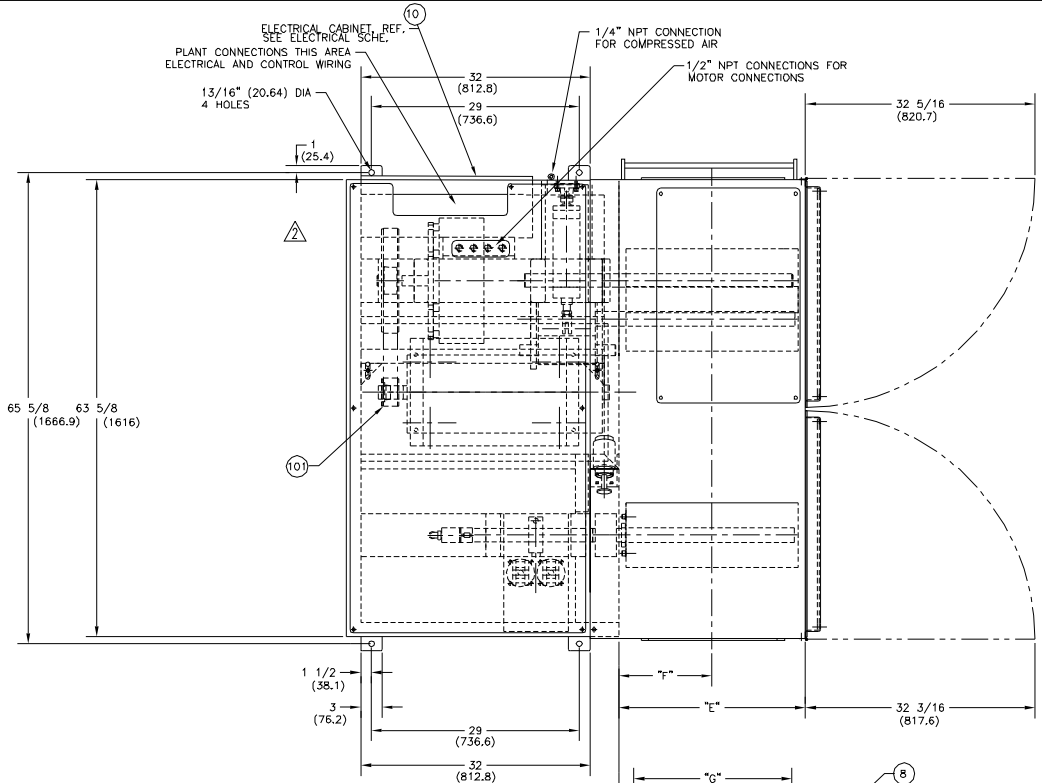

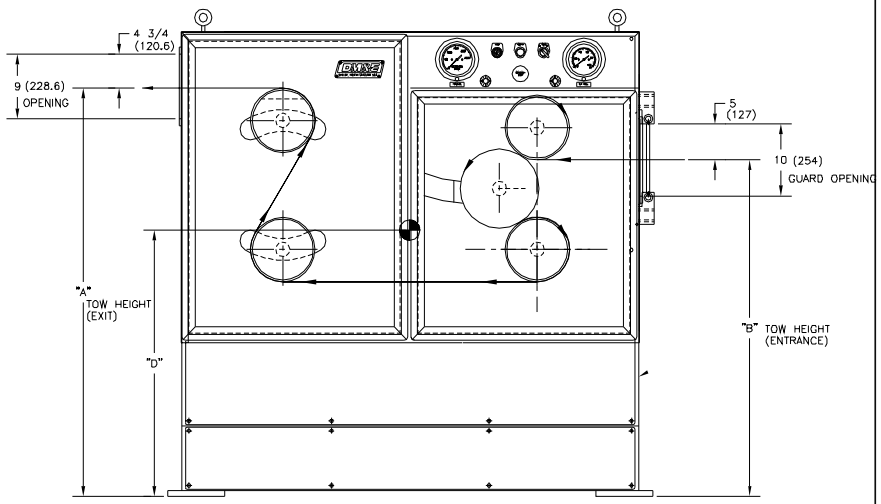

57" TOW HEIGHT ASSEMBLY

NOTES:
1- LIFTING POINTS ARE LOCATED ON TOP OF MACHINE AT EYE BOLTS. BOTTOM SURFACE OF FRAME CAN ALSO BE USED FOR LIFTING MACHINE.
2- WEIGHT: 2,500 LBS. (APPROX.)

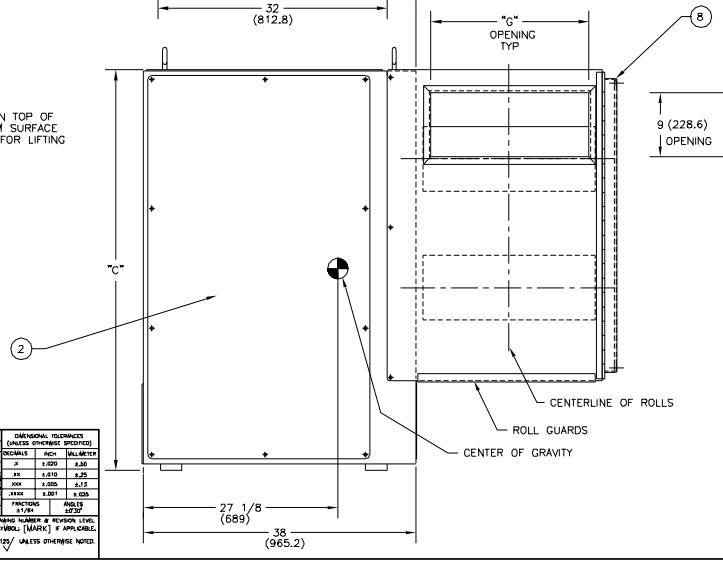

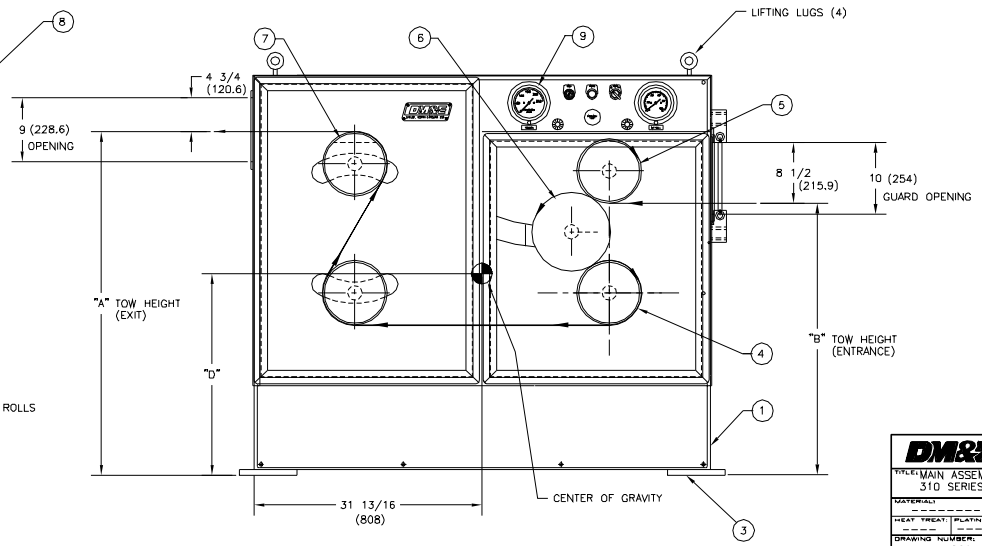

REV	DESCRIPTION	ENG.	DATE
7			
6			
5			
4			
3	MATCHED BALLOONS TO BOM'S	MRC	01/06
2	REMOVED DOORS	MRC	10/02
1	MISC. REVISIONS, MOVED NAMEPLATE, CONTROLS	DPL	5/98

DIMENSIONAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)

DECIMALS	INCH	MILLIMETER
.X	±.020	±.50
.XX	±.010	±.25
.XXX	±.005	±.12
.XXXX	±.001	±.025
FRACTIONS ±1/64		ANGLES ±0°30'

1. INTERPRET SYMBOLS PER ANSI Y14.5M-1982.
2. DEBURR & BREAK ALL SHARP EDGES & CORNERS .01/.03 R OR 45° CHAMFER.
3. CHAM ALL TAPPED HOLES 1-1/2 PITCH + 82°/90° BEFORE TAPPING.
4. DIMENSIONAL TOLERANCES APPLY AFTER PLATING.
5. ETCH OR STAMP DRAWING NUMBER & REVISION LEVEL ON SURFACE WITH SYMBOL (MARK) IF APPLICABLE.
6. SURFACE FINISHES 125 UNLESS OTHERWISE NOTED.

DM&E — DM&E CORPORATION SHELBY, NORTH CAROLINA

TITLE: MAIN ASSEMBLY
310 SERIES TENSION STAND

MATERIAL: ---------- | DRN: AMC | CHK:
HEAT TREAT: ----- | PLATING: ----- | DATE: 10/96 | SCALE: 1/8"=1"

DRAWING NUMBER: 880-365-D | REV: 3